

A-CONTROL REMOTE CONTROLLER

MA DELUXE REMOTE CONTROLLER PAR-21MAA

Dot liquid-crystal display is applied


Symbols, Japanese, Chinese, English, Germany, Spanish, Russian, Italian, French display can be selected freely.



Dot Liquid Crystal Display

Acknowledging the operation and control status at a glance. The large size display upgrades visual acknowledgement capability. The operation and control status can be understood promptly.

Display example [Operation mode]
Dot liquid crystal display section

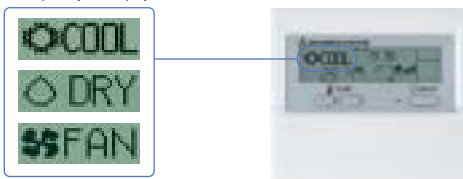

Multi-language Display

Multi-language

8 languages

can be displayed.

Display can be switched over for 8 kinds of language.



Operation Control Function

Limiting the set temperature range

Air conditioning operation always within a limited temperature range

Auto Off timer

Automatic turning off of air conditioning operation

Operation locking






Preventing the random modification of setting

Weekly Timer

The function of the weekly timer equipped can change the set temperature in addition to the ON/OFF control. Up to 8 patterns can be set for each calendar day.

Functions

□:Each unit ○:Each group X:Not available

Item	Description	Operations	Display	Item	Description	Operations	Display
ON/OFF	Run and stop operation for a single group	○	○	Prohibition/permission of specified mode (Cooling prohibited /heating prohibited /cooling-heating prohibited)	By the setting from System Controller, the operation for the following modes is prohibited. At cooling prohibited : Cool, Dry, Auto, At heating prohibited : Heat, Auto, At cooling-heating prohibited : Cool, Heat, Dry, Auto	X	○
 Operation mode switching	Switches between Cool / Dry / Auto / Fan / Heat. Operation modes vary depending on the air conditioner unit.	○	○	Indoor unit intake temperature	Measures the intake temperature of the indoor unit when the indoor unit is operating.	X	○
 TEMP. Temperature setting	Sets the temperature for a single group Range of temperature setting Cool/Dry : 19°C - 30°C (66°F - 86°F) Heat : 17°C - 28°C (63°F - 82°F) Auto : 19°C - 28°C (66°F - 82°F)	○	○	Error	When an error is currently occurring on an air conditioner unit, the afflicted unit and the error code are displayed.	X	□
 Fan speed setting	Models with 4 air flow speed settings: Hi/Mid-2/Mid-1/Low Models with 3 air flow speed settings: Hi/Mid/Low Models with 2 air flow speed settings: Hi/Low	○	○	Test run	This operates air conditioner units in test run mode.	○	○
 Air flow direction setting	Air flow direction angles 100% - 80% - 60% - 40%, Swing, Louver ON/OFF Air flow direction settings vary depending on the model.	○	○	 Ventilation equipment	Up to 16 indoor units can be connected to an interlocked system that has one LOSSNAY. LOSSNAY items that can be set are "Hi" "Low" "Stop". Ventilation mode switching is not available.	○	○
Weekly scheduler	ON/OFF/Temperature setting can be done up to 8 times one day in the week. The time can be set by the minute.	○	○	Function to limit the setting range of room temperature (Set temperature range limit)	The range of room temperature setting can be limited by the initial setting. The lowest limit temperature can be made higher than the usual (19°C) at cooling/drying, while the upper limit temperature lower than the usual (28°C) at heating.	○	○
Permit / Prohibit local operation	Individually prohibit operation of each local remote control function (Start/Stop, Change operation mode, Set temperature, Reset filter). *1: When the local remote controller inactivation command is received from the master system controller, " " is displayed.	X	○ *1	Easy-to-operate simplified locking function (Auto lock function)	Setting/releasing of simplified locking for remote control switch can be performed. · Locking of all switches · Locking of all switches except Start/Stop switch	○	○

External dimension

Unit:mm

