# Air Conditioning

## **Product Information**

**PEAD-RP125JAQ** (Single Phase) **Standard Inverter Heat Pump** Ceiling Concealed Ducted System

Making a World of Difference

### mr.slim.



Our Standard Inverter range offers customers all the features and benefits of inverter technology whilst being cost effective.

#### **Key Features**

- Reduced height entire range only 250mm
- Wider range of external static pressure settings across entire range
- Drain pump included as standard



Air Conditioning | Heating Ventilation | Controls



## **Product Information**

**PEAD-RP125JAQ** (Single Phase) **Standard Inverter Heat Pump** Ceiling Concealed Ducted System

Making a World of Difference


PEAD-RP - INDOC	PEAD-RP125JAQ			
CAPACITY (kW)	Heating (nominal)	14.0 (5.0-16.0)		
	Cooling (nominal)	12.3 (5.5-14.0)		
	Heating (UK)	11.9 (4.25-13.6)		
	Cooling (UK)	11.3 (5.05-12.9)		
SHF (nominal & UK)	0.85			
COP / EER (nominal)	3.62 / 2.91			
SCOP / SEER (BS EN14825	3.9 / 3.5			
ErP ENERGY EFFICIENCY CLASS	Heating/Cooling	N/A		
AIRFLOW (I/s)	Lo-Mi-Hi	492-558-700		
PIPE SIZE mm (in)	Gas	15.88 (5/8")		
	Liquid	9.52 (3/8")		
EXTERNAL STATIC PRESSURE (Pa)		35-50-70-100-150		
SOUND PRESSURE LEVEL (dBA)	Lo-Mi-Mi2-Mi3-Hi	33-36-40		
SOUND POWER LEVEL (dBA)		63		
DIMENSIONS (mm)	Width x Depth x Height	1400 x 732 x 250		
WEIGHT (kg)		43		
ELECTRICAL SUPPLY		Fed by Outdoor Unit		
FUSE RATING (BS88) - HRC (A)		6		
INTERCONNECTING CABLE No. Cores		4		


Air Conditioning

PUHZ-P - OU	TDOOR UNITS	PUHZ-P125VHA3		
SOUND PRESSURE LEVEL (dBA) Heating/Cooling		55 / 51		
SOUND POWER LEVEL (dBA) Heating/Cooling		71		
WEIGHT (kg)	99			
DIMENSIONS (mm)	Width x Depth x Height	950 x 330 + 30 x 1350		
ELECTRICAL SUPPLY		220-240v, 50Hz		
PHASE		Single		
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	3.87 / 4.22		
	Heating/Cooling (UK)	3.44 / 3.59		
STARTING CURRENT (A)		15.0		
SYSTEM RUNNING CURRENT (A) Heating/Cooling [MAX]		19.03 / 19.66 [30.76]		
FUSE RATING (BS88) - HRC (A)		32		
MAINS CABLE No. Cores		3		
MAX PIPE LENGTH (m)		50		
MAX HEIGHT DIFFERENCE (m)		30		
CHARGE R410A (kg)		4.5		

Notes: All units charged to 7m (35-71), 30m (100-140) pipe length.



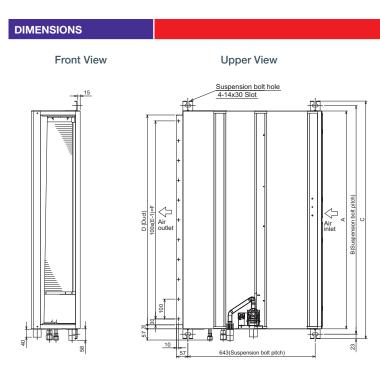

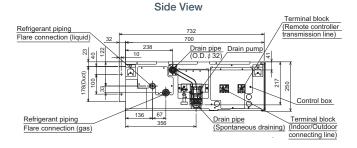

Model	Α	в	С	D	Е	F
PEAD-RP125JAQ	1400	1454	1500	1360	14	1300



#### Telephone: 01707 282880

email: air.conditioning@meuk.mee.com web: www.airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environmental Systems Division

Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881 IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Kingdom – Japan – Thailand – Malaysia. @Mitsubishi Electric Europe 2015. Mitsubishi Bectric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior origitation amouncement. Mitsubishi Electric is constantly developing and improving its products. Al descriptions, literations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. Al descriptions, literations, drawings and specifications in this publication present noriging the advantant of the part of any contract. Al descriptions, literations, drawings and specifications in this publication present normal set advantant of advantant of any contract. All descriptions, literations on equest. Third-party product and brand remes may be trademarks or registered trademarks of their respective owners.



www.greengateway.mitsubishielectric.co.uk Mitsubishi Electric UK's commitment to the environment



mitsubishielectric2

 Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electricial velocitrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electrics air conditioning and heat pump systems contain fluorinated greenhouse gases R410A, R407C and R134a.

Effective as of April 2015