Air Conditioning

Product Information

PEAD-RP125JAQ (Three Phase) **Standard Inverter Heat Pump** Ceiling Concealed Ducted System

Making a World of Difference



Our Standard Inverter range offers customers all the features and benefits of inverter technology whilst being cost effective.

Key Features

- Reduced height entire range only 250mm
- Wider range of external static pressure settings across entire range
- Drain pump included as standard





Product Information

PEAD-RP125JAQ (Three Phase) **Standard Inverter Heat Pump**Ceiling Concealed Ducted System

Making a World of Difference

Air Conditioning


PEAR PR 11/20		PEAR PROFILE
PEAD-RP - INDOOR UNITS		PEAD-RP125JAQ
CAPACITY (kW)	Heating (nominal)	14.0 (5.0-16.0)
	Cooling (nominal)	12.3 (5.5-14.0)
	Heating (UK)	11.9 (4.25-13.6)
	Cooling (UK)	11.3 (5.05-12.9)
SHF (nominal & UK)		0.85
COP / EER (nominal)		3.62 / 2.91
SCOP / SEER (BS EN14825)		3.9 / 3.5
ErP ENERGY EFFICIENCY CLASS Heating/Cooling		N/A
AIRFLOW (I/s)	Lo-Mi-Hi	492-558-700
PIPE SIZE mm (in)	Gas	15.88 (5/8")
	Liquid	9.52 (3/8")
EXTERNAL STATIC PRESSURE (Pa)		35-50-70-100-150
SOUND PRESSURE LEVEL (dBA) Lo-Mi-Hi		33-36-40
SOUND POWER LEVEL (dBA)		63
DIMENSIONS (mm)	Width x Depth x Height	1400 x 732 x 250
WEIGHT (kg)		43
ELECTRICAL SUPPLY		Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6
INTERCONNECTING CABLE No. Cores		4


PUHZ-ZRP - OUTDOOR UNITS		PUHZ-P125YHA 3 Three Phase
SOUND PRESSURE LEVEL (dBA) Heating/Cooling		55 / 51
SOUND POWER LEVEL (dBA) Cooling		71
WEIGHT (kg)		101
DIMENSIONS (mm)	Width x Depth x Height	950 x 330 + 30 x 1350
ELECTRICAL SUPPLY		380-415v, 50Hz
PHASE		Three
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	3.87 / 4.22
	Heating/Cooling (UK)	3.44 / 3.59
STARTING CURRENT (A)		5.0
SYSTEM RUNNING CURRENT (A) Heating/Cooling [MAX]		8.38 / 8.58 [15.76]
FUSE RATING (BS88) - HRC (A)		16
MAINS CABLE No. Cores		5
MAX PIPE LENGTH (m)		50
MAX HEIGHT DIFFERENCE (m)		30
CHARGE R410A (kg)		4.5

3 Three Phase

Notes: All units charged to 30m (100-140) pipe length.



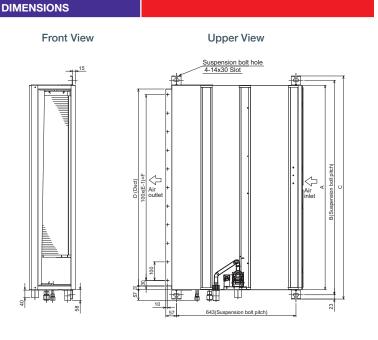



 Model
 A
 B
 C
 D
 E
 F

 PEAD-RP100JAQ
 1400
 1454
 1500
 1360
 14
 1300



Telephone: 01707 282880

email: air.conditioning@meuk.mee.com web: www.airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environmental Systems Division
Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)


Country of origin: United Kingdom — Japan — Thialand — Malaysia. OMitsubishi Bectric Europe 2015. Mitsubishi and Mitsubishi Eelectric are trademarks of Mitsubishi Eelectric Europe 8.V. The company reserves the right to make any variation in technical specification for the equipment described, or to withdraw or replace products without prior notification or public amonoment. Mitsubishi Electric's constraintly developing and improving its products. All descriptors, likistrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on equest. Third-party product and brand armses may be trademarks or present expective owners.













Mitsubishi Electric UK's commitment to the environment





