## Air Conditioning

### **Product Information**

**PEAD-RP140JAQ** (Single Phase) **Standard Inverter Heat Pump**Ceiling Concealed Ducted System

Making a World of Difference



Our Standard Inverter range offers customers all the features and benefits of inverter technology whilst being cost effective.

#### **Key Features**

- Reduced height entire range only 250mm
- Wider range of external static pressure settings across entire range
- Drain pump included as standard



Air Conditioning | Heating Ventilation | Controls



### **Product Information**

**PEAD-RP140JAQ** (Single Phase) **Standard Inverter Heat Pump**Ceiling Concealed Ducted System

Making a World of Difference


# Air Conditioning


PEAD-RP - INDOOR UNITS		PEAD-RP140JAQ
CAPACITY (kW)	Heating (nominal)	16.0 (5.0-18.0)
	Cooling (nominal)	13.6 (5.5-15.0)
	Heating (UK)	13.6 (4.25-15.3)
	Cooling (UK)	12.5 (5.05-13.8)
SHF (nominal & UK)		0.84
COP / EER (nominal)		3.61 / 3.01
SCOP / SEER (BS EN14825)		3.7 / 3.2
ErP ENERGY EFFICIENCY CLASS	Heating/Cooling	N/A
AIRFLOW (I/s)	Lo-Mi-Hi	533-650-767
PIPE SIZE mm (in)	Gas	15.88 (5/8")
	Liquid	9.52 (3/8")
EXTERNAL STATIC PRESSURE (Pa)		35-50-70-100-150
SOUND PRESSURE LEVEL (dBA)	Lo-Mi-Mi2-Mi3-Hi	34-38-43
SOUND POWER LEVEL (dBA)		66
DIMENSIONS (mm)	Width x Depth x Height	1600 x 732 x 250
WEIGHT (kg)		47
ELECTRICAL SUPPLY		Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6
INTERCONNECTING CABLE No. Cores		4

PUHZ-P - OUTDOOR UNITS		PUHZ-P140VHA3
SOUND PRESSURE LEVEL (dBA) Heating/Cooling		56 / 52
SOUND POWER LEVEL (dBA) Heating/Cooling		73
WEIGHT (kg)		99
DIMENSIONS (mm)	Width x Depth x Height	950 x 330 + 30 x 1350
ELECTRICAL SUPPLY		220-240v, 50Hz
PHASE		Single
SYSTEM POWER	Heating/Cooling (nominal)	4.43 / 4.52
INPUT (kW)	Heating/Cooling (UK)	3.94 / 3.84
STARTING CURRENT (A)		15.0
SYSTEM RUNNING CURRENT (A) Heating/Cooling [MAX]		23.8 / 24.97 [32.28]
FUSE RATING (BS88) - HRC (A)		40
MAINS CABLE No. Cores		3
MAX PIPE LENGTH (m)		50
MAX HEIGHT DIFFERENCE (m)		30
CHARGE R410A (kg)		4.5

Notes: All units charged to 7m (35-71), 30m (100-140) pipe length.



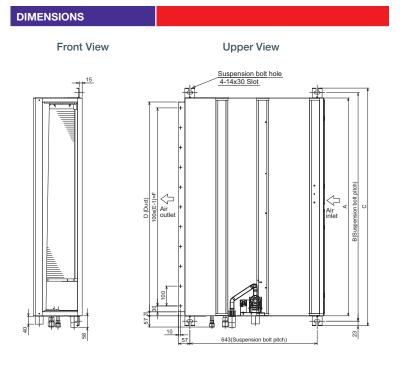

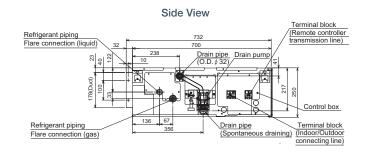

 Model
 A
 B
 C
 D
 E
 F

 PEAD-RP140JAQ
 1600
 1654
 1700
 1560
 16
 1500



Telephone: 01707 282880

email: air.conditioning@meuk.mee.com web: www.airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environmental Systems Division
Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881
IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland

Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)


Country of origin: United Kingdom — Japan — Thialand — Malaysia. (Mitsubish) Electric Europe 2015. Missubish and Mitsubish 2015 Electric are trademarks of Missubish Electric Europe 8.V. The company reserves the right to make any evaletion in technical specification for the equipment described, or to withdraw or replace products without prior notification or public amountenent. Missubish Electric is constraintly developing and improving its products. All descriptors, likistrations, drawings and specifications in this publication present only general products and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on equest. Third-party product and brand armses may be trademarkes or registered trademarks of their respective owners.













Mitsubishi Electric UK's commitment to the environment





